



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
16.08.2001 Bulletin 2001/33

(51) Int Cl.7: **B05C 11/04**
// D21G3/00, D21H25/10

(21) Application number: 01102568.1

(22) Date of filing: 06.02.2001

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: **Rata, Ilkka**
40520 Jyväskylä (FI)

(74) Representative:
Leson, Thomas Johannes Alois, Dipl.-Ing.
Patentanwälte
Tiedtke-Bühling-Kinne & Partner,
Bavariaring 4
80336 München (DE)

(30) Priority: 08.02.2000 FI 20000254

(71) Applicant: **Metso Paper, Inc.(Reg.No. 763281)**
00130 Helsinki (FI)

(54) **Composite blade and a method for its manufacture**

(57) The invention relates to a composite blade, in which there is an essentially plate-like blade component (13) with a composite-construction and retention members arranged in its rear part (14). The blade (10) is intended to be installed in a special blade holder (11) with

the said retention members remaining in the throat (15) of the blade holder (11). The retention members are formed of profiling (16) arranged as a lateral extension of the blade component (13). The profiling (16) extends essentially over the entire length of the blade (10) and is of the same piece as the blade component (13).

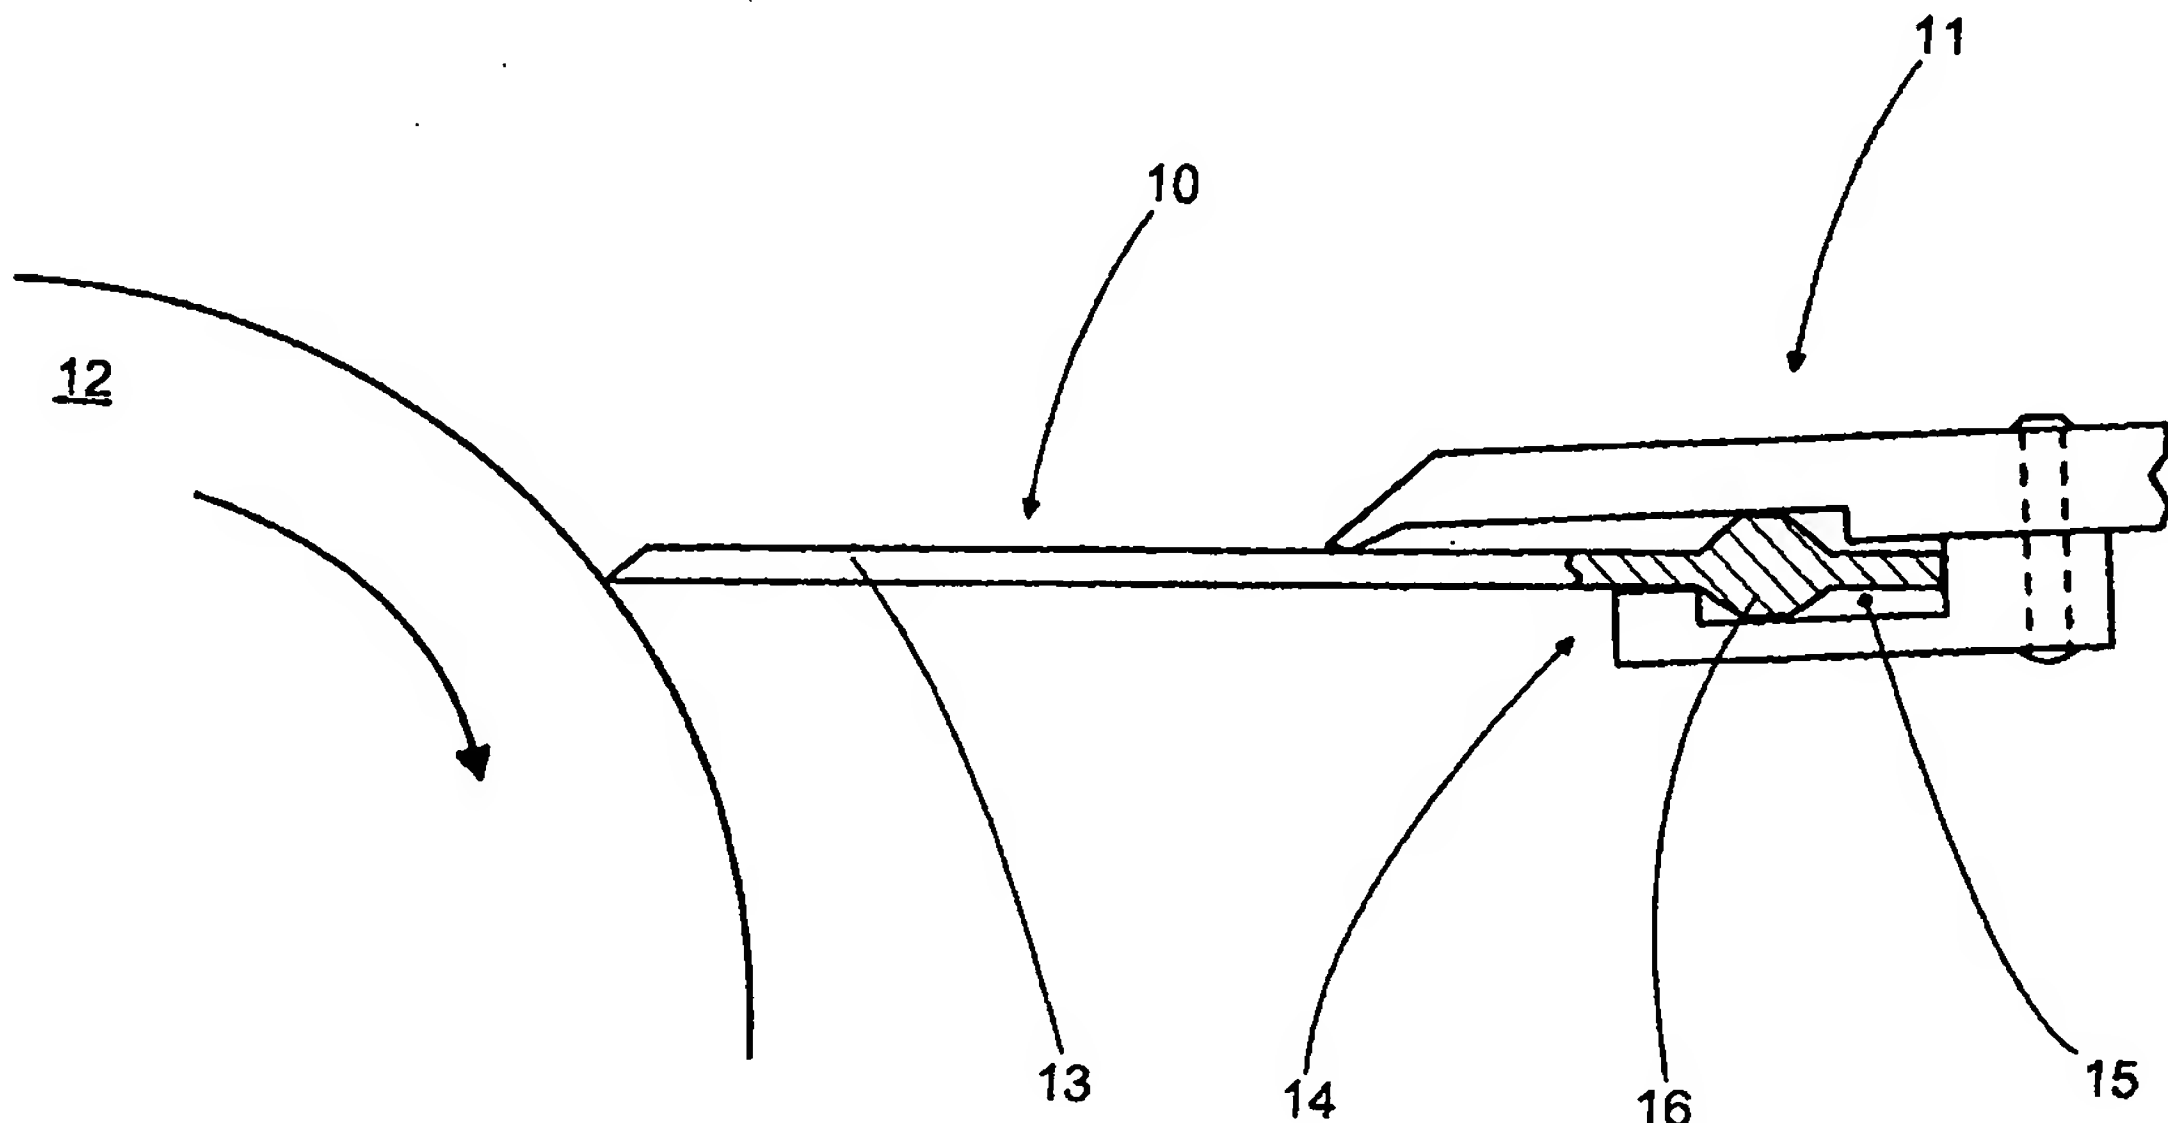


Fig. 1

Description

[0001] The present invention relates to a composite blade, in which there is an essentially plate-like blade component with a composite-construction and retention members arranged in its rear part, which blade is intended to be installed in a special blade holder with the said retention members remaining in the throat of the blade holder. The invention also relates to a method for manufacturing the said blade.

[0002] At present composite blades are used in, for example, the doctors of paper machines. Rivets are installed in such composite-construction doctor blades, as they are in metal doctor blades too. The rivets are mainly intended to prevent the doctor blade from falling out of the blade holder. In addition, the rivets hold the doctor blade at the correct angle and in the correct position in the blade holder.

[0003] However, rivetting is a difficult and time-consuming stage of work, requiring special tools. In addition, before rivetting, holes must be made in the doctor blade, which is also labourious. Usually metal rivets are used, which must, however, be removed when the doctor blade is recycled or otherwise reused. Metal rivets also tend to jam during both installation and removal while they also scratch the blade holder. A scratched blade holder dirties more easily and aggravates the jamming of the metal rivets. Metal rivets or parts of them can also fall into the process and find their way into a roll nip, for example, with destructive consequences.

[0004] The invention is intended to create a composite blade, which is simpler and more user-friendly than before, and which avoids the drawbacks of the state of the art. The invention is also intended to create a method for manufacturing the said composite blade more economically and with fewer work stages. The characteristic features of this invention are stated in the accompanying Claims. In the blade according to the invention, the rivets are replaced with a new kind of retention member, which is of the same material as the blade itself. Thus, the retention members neither scratch the blade holder nor jam. In addition, according to the method the said retention members are also formed during the manufacture of the blade. This entirely eliminates the stage of installing a separate retention member. Other advantages of the blade and method according to the invention are described in greater detail in connection with the disclosure.

[0005] In the following, the invention is described in detail with reference to the accompanying drawings showing some applications of the invention, in which

Figure 1 shows a blade according to the invention installed in the blade holder of a doctor,
 Figures 2a - 2d show cross-sections of certain applications of the blade according to the invention,

Figure 2e shows another application of the blade of Figure 2d,
 Figures 3a - 3b show front views of two blanks according to the invention,
 5 Figure 3c shows partial cross-sections of the blade according to the invention in both the longitudinal and transverse directions.

10 [0006] Figure 1 shows a blade 10 according to the invention installed in the blade holder 11 of a doctor. Besides a doctor, the blade according to the invention can be used, for instance, in coating equipment or in other similar places. In this case, the surface of the roll 12 is doctored by the blade 10, which is installed in the blade holder 11 forming a part of the doctor. Figure 1 shows only a part of the blade holder 11.

[0007] The blade 10 is generally manufactured from a composite material and includes an essentially plate-like blade component 13. In addition, retention members, which remain in the throat 15 of the blade holder 11 and thus prevent the blade 10 from falling out of the blade holder 11, are arranged in the rear part 14 of the blade component 13. According to the invention, the retention members form a profiling 16 arranged as a transverse continuation of the blade component 13, which extends essentially over the entire length of the blade 10 and which is of the same piece as the blade component 13. Thus the blade has no separate parts, which could detach and fall. In addition, profiling the composite material eliminates the scratching of the blade holder and the jamming associated with metal rivets. The profiling can also be easily shaped to correspond to the shape of the throat.

35 [0008] The shape of the profiling can be varied, depending on the blade holder and its throat. Figures 2a - 2e show only a few different alternative shapes for the profiling. The same reference numbers are used for components that are functionally similar. In Figures 2a and 2b the profiling 16 has an essentially uniform cross-section. This creates a durable profiling, ensuring that the blade will remain in place. In addition, the profiling 16 extends to both sides of the blade component 13 over the thickness of the blade component 13. Blades of this kind are particularly suitable for use in traditional blade holders. However, one-sided profilings (not shown) can be used, for example, in a blade holder specially shaped for a blade according to the invention. The profiling 16 of Figure 2a is angular, so that it will sit precisely in the throat of the blade holder. The profiling 16 of Figure 2b has an essentially round cross-section, allowing it to turn in the throat. In certain blade positions this is intentional.

50 [0009] The blade can be given additional properties by giving the profiling a non-uniform cross-section and making the protruding parts of the profiling flexible. Figure 2c shows this application, which has a profiling 16 with flexible strips 17 on each side of the blade component 13. This profiling 16 also has a protrusion 18

shaped in it, to act as a support and pivot point of the blade 10. These flexible properties can be used, for example, to keep the blade at a desired angle in the blade holder. Correspondingly, good flexibility can be achieved even in a rigid blade holder, if the blade is a flexible element.

[0010] In addition, the profiling can be shaped to create new properties in the blade. According to Figures 2d and 2e the profiling 16 has a hollow cross-section. This also allows the interior space 19 that is then formed to be used as a connection for a medium to the upper and/or lower side of the blade 10. The profiling 16 of Figure 2d can also be made flexible. Thus, the profiling 16 can be used to conduct a medium over the full length of the blade component 13. The medium used can be air, a lubricating substance, or similar. In Figure 2e, besides the profiling 16, holes 20, through which the substance is led onto the top of the blade component 13, are made at regular intervals, creating further opportunities to control the doctoring and increase its efficiency. For instance, the blade can be lubricated during the down running or air can be led from the holes to make doctoring more efficient. Similarly, the blade holder can be washed by a substance led from suitably placed holes. Figure 2e also shows transverse holes 21 in blade component 13, through which a substance can be led to the edge of the blade. However, such holes 21 are more difficult to arrange than the holes 20 in the profiling 16. The operating properties referred to above make it advantageous to use a blade according to the invention precisely as the doctor blade of a doctor.

[0011] In the manufacture of a blade according to the invention, a unified blank 22 is formed from a composite material, thus simultaneously forming both the blade component 13 and the profiling 16 forming the retention members. Thus, there is no need for a separate stage to attach the retention members. Finally the blade with its retention members is detached from the shaped blank 22. According to Figures 3a and 3b, two or more blades 10 and corresponding profiling 16 can be advantageously formed in a single blank 22. It is then simple to increase the number to be manufactured. The blanks 22 shown are preferably formed by pultrusion. This gives excellent shape and dimensional precision, eliminating the need to separately finish the blade. The profiling is created by adjusting the setting of the pultrusion device and the shape of the nozzle. Pultrusion also allows the orientation of the reinforcement fibres contained in the composite material. The reinforcing fibres 25 in the blade are preferably arranged essentially laterally in the blade 10 (Figure 3c). This makes the blade rigid laterally but essentially flexible longitudinally. Thus the loading of the doctor, for example, is transmitted as well as possible to the doctor blade. On the other hand, a doctor blade that is flexible longitudinally adapts very well to the shapes of the surface being doctoring. In addition, the reinforcing fibres effectively conduct heat away from the edge of the blade to the rest of the blade.

Despite the preferred embodiment described above, the reinforcing fibres can in principle be oriented in nearly any direction at all. Usually, however, the orientation of the reinforcing fibres is nearly evenly divided between the lateral and longitudinal directions.

[0012] Pultrusion is thus used to achieve a blank with precise dimensions and shape, so that in principle the blades will be ready for use after being detached. In Figure 3a, a single V-shaped saw cut 23 will not only detach blade 10 but also give its edge its characteristic shape. A simple cut will also create four blades 10 from the blank of Figure 3b. Figure 1 shows a corresponding blade. Blade detachment can be easily combined with the pultrusion device, so that an endless blade can be manufactured easily and quickly. In the same connection, a series of holes 24 or similar, arranged according to the blade-moving devices to be used, can be machined in the upper and/or lower surfaces of the profiling. Thus the blade can be moved using a crown-wheel with teeth that engage in the holes. In addition, the said holes make the blade more flexible, so that it can be rolled, for example, into a blade case or an automatic blade-changing device.

[0013] The aforesaid holes 24 also appear in Figures 2a and 2b. In addition to the reinforcing fibres 25, Figure 3c shows the so-called traction fibres 26, which are generally glass-fibres, and which are used to pull the blank 22 through the nozzle (not shown). As pultrusion is, as such, a known technique, it is not described in this connection in any greater detail. The arrow shows the direction of the traction of the blank.

[0014] The method according to the invention avoids the need for separate rivetting work stages and equipment. In addition, manufacture of the blade is faster and more economical than before. Material waste is also reduced, as the thickenings required by the manufacturing technique can be exploited as profilings. The operation of a blade according to the invention will not scratch the blade holder, which is especially important when using composite blade holders. The reduction of scratching also reduces the dirtying of the blade holder, making it easier to keep clean. Parts also do not detach from the blade.

[0015] A blade according to the invention will not jam when being installed, making installation and removal faster and easier. Recycling of the blade is also easier, as the entire blade with its profiling is made from a single material. Materials sorting is not then required. The elimination of jamming is particularly important in connection with an automatic blade-changing device and with a blade box and recycling box. A lack of jamming is essential for the flexible and trouble-free operation of an automatic blade-changing device.

[0016] The invention relates to a composite blade, in which there is an essentially plate-like blade component (13) with a composite-construction and retention members arranged in its rear part (14). The blade (10) is intended to be installed in a special blade holder (11) with

the said retention members remaining in the throat (15) of the blade holder (11). The retention members are formed of profiling (16) arranged as a lateral extension of the blade component (13). The profiling (16) extends essentially over the entire length of the blade (10) and is of the same piece as the blade component (13).

Claims

1. A composite blade, in which there is an essentially plate-like blade component (13) with a composite-construction and retention members arranged in its rear part (14), and which blade (10) is intended to be installed in a special blade holder (11) with the said retention members remaining in the throat (15) of the blade holder (11), characterized in that the retention members are formed of profiling (16) arranged as a lateral extension of the blade component (13), which profiling (16) extends essentially over the entire length of the blade (10) and which is of the same piece as the blade component (13).
2. A blade according to Claim 1, characterized in that the profiling (16) is essentially uniform in cross-section and extends on both sides of the blade component (13) over the thickness of the blade component (13).
3. A blade according to Claim 1, characterized in that the profiling (16) has a non-uniform cross-section and the protruding parts (17) of the profiling (16) are formed to be flexible.
4. A blade according to Claim 1, characterized in that the profiling (16) has a hollow cross-section, in which case a medium connection (20, 21) is arranged to the upper and/or lower side of the blade component (13) from the interior space (19) of the profiling (16) thus formed.
5. A blade according to one of Claims 1 - 4, characterized in that the composite material contains reinforcing fibres (25), arranged essentially in the lateral direction of the blade (10).
6. A blade according to one of Claims 1 - 5, characterized in that the blade (10) is arranged to be used as the doctor blade of a doctor.
7. A method for manufacturing a composite blade, in which method an essentially plate-like blade component (13) is formed from composite material, and retention members are arranged in the rear part (14) of the blade component (13) to retain the blade (10) in the throat (15) of a special blade holder (11), characterized in that a unified blank (22) is formed from composite material, to that both the blade com-

ponent (13) and the profiling (16) forming the retention members are manufactured simultaneously, and from which blank the blade (10) with its retention members is detached.

8. A method according to Claim 7, characterized in that the blank (22) is formed by pultrusion.
9. A method according to Claim 7 or 8, characterized in that two or more blades (10) and their corresponding profiling (16) are formed in the blank (22).
10. A method according to one of Claims 7 - 9, characterized in that holes (24) or similar, arranged according to the blade-moving devices to be used, are machined in the upper and/or lower surface of the profiling (16).









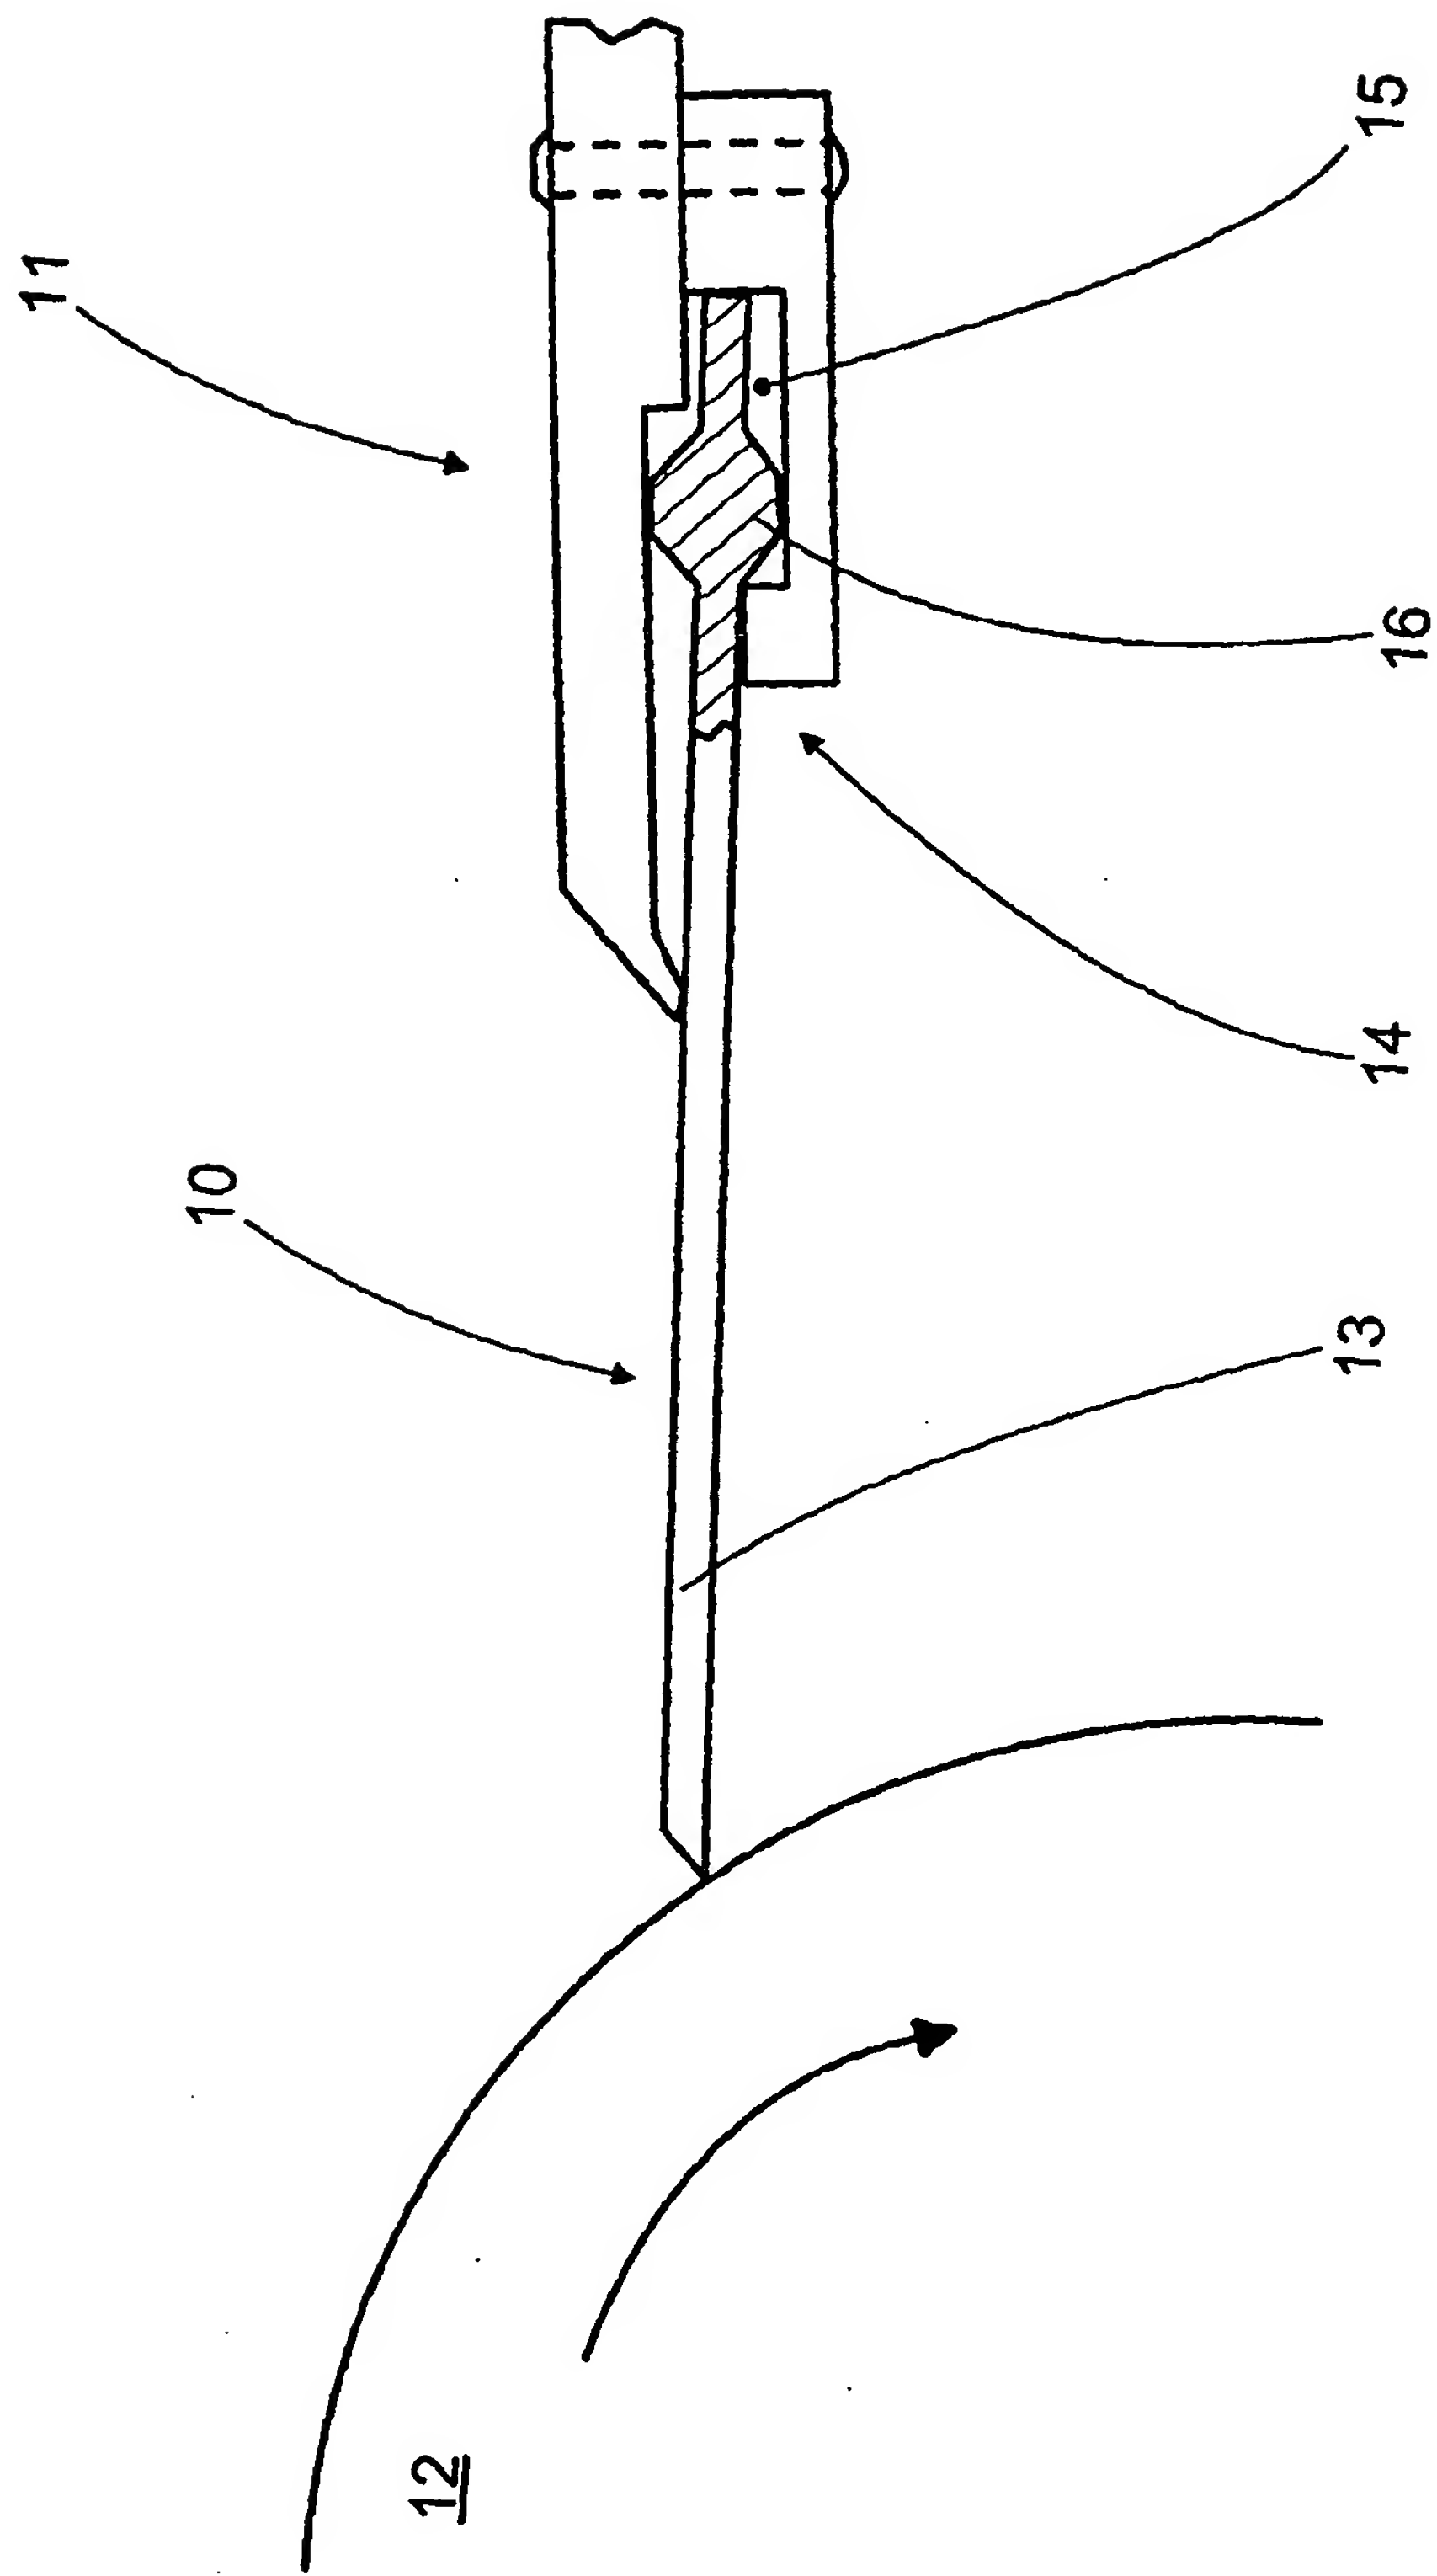


Fig. 1

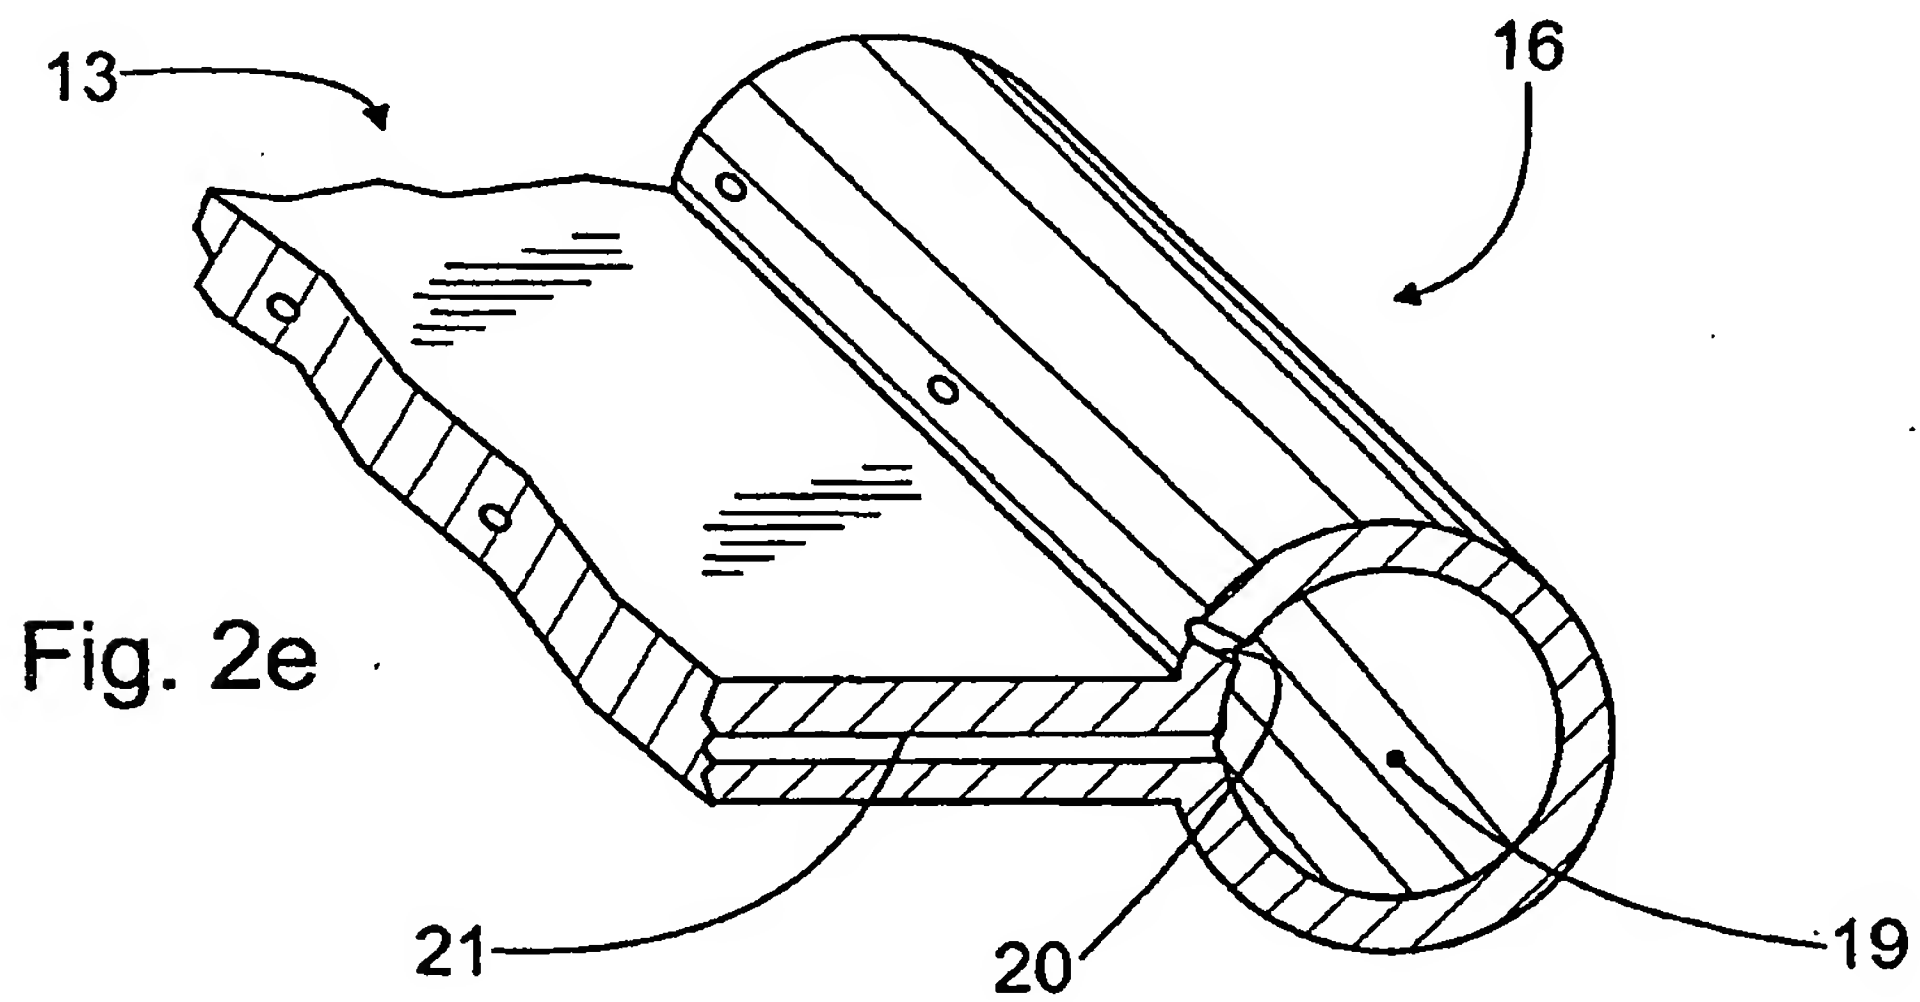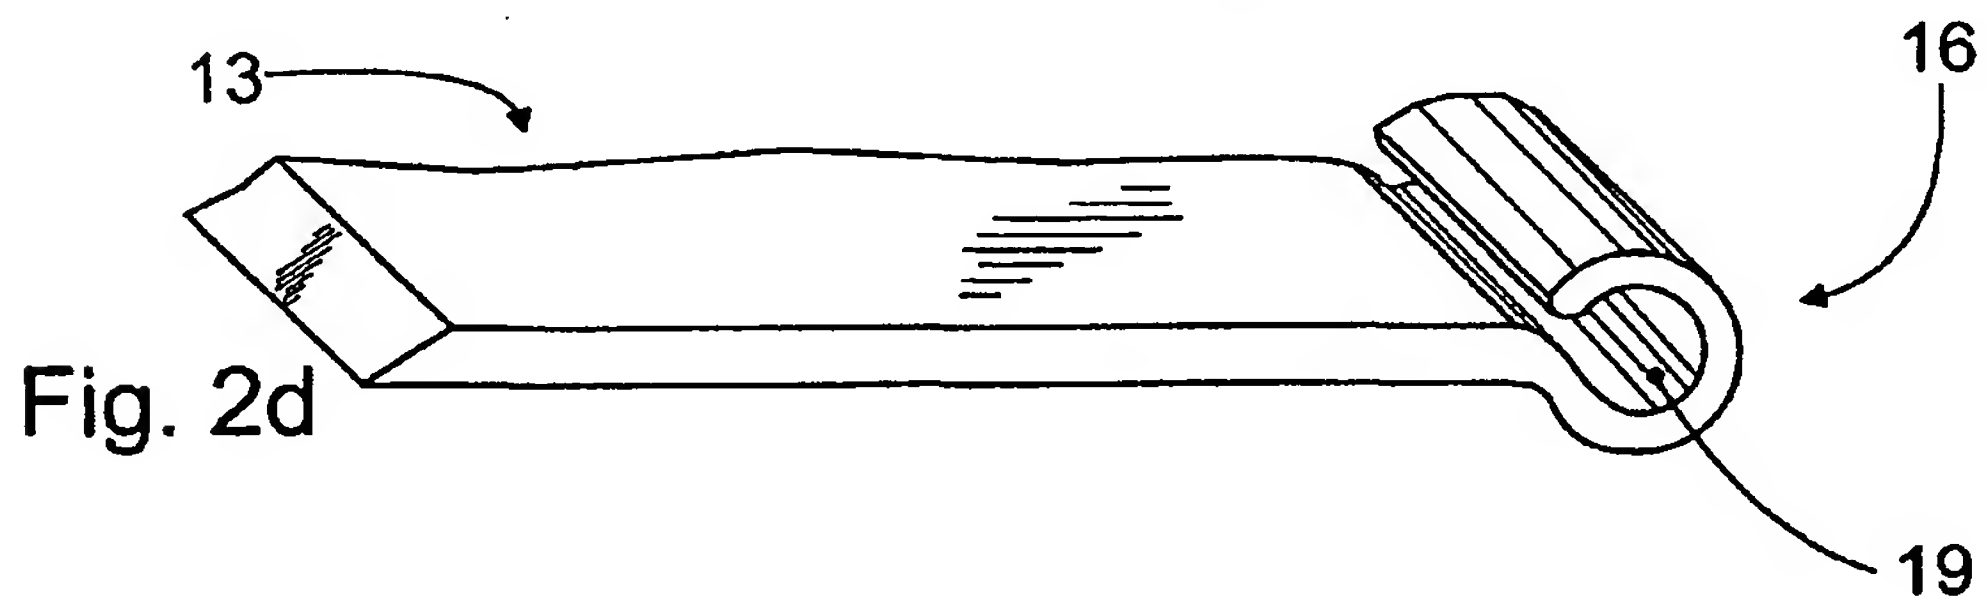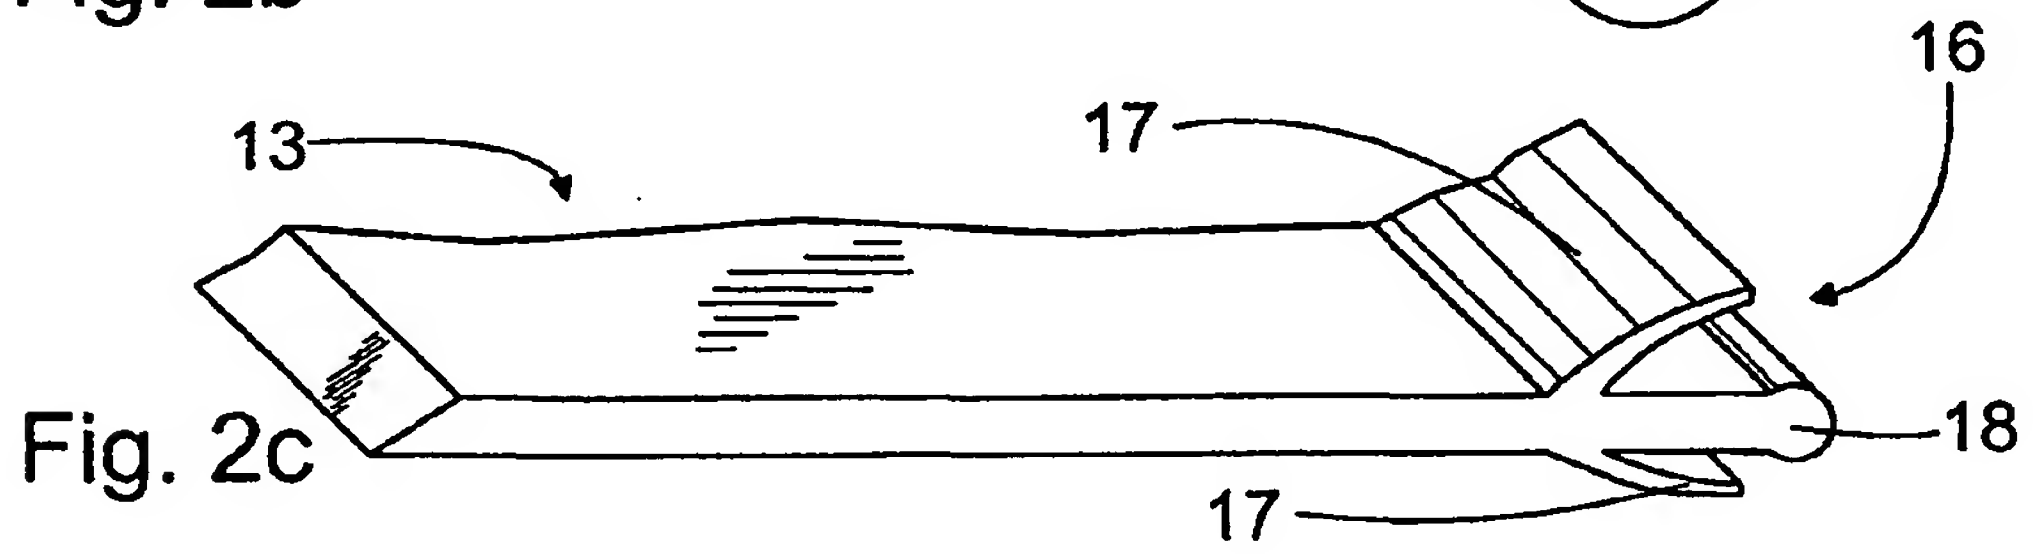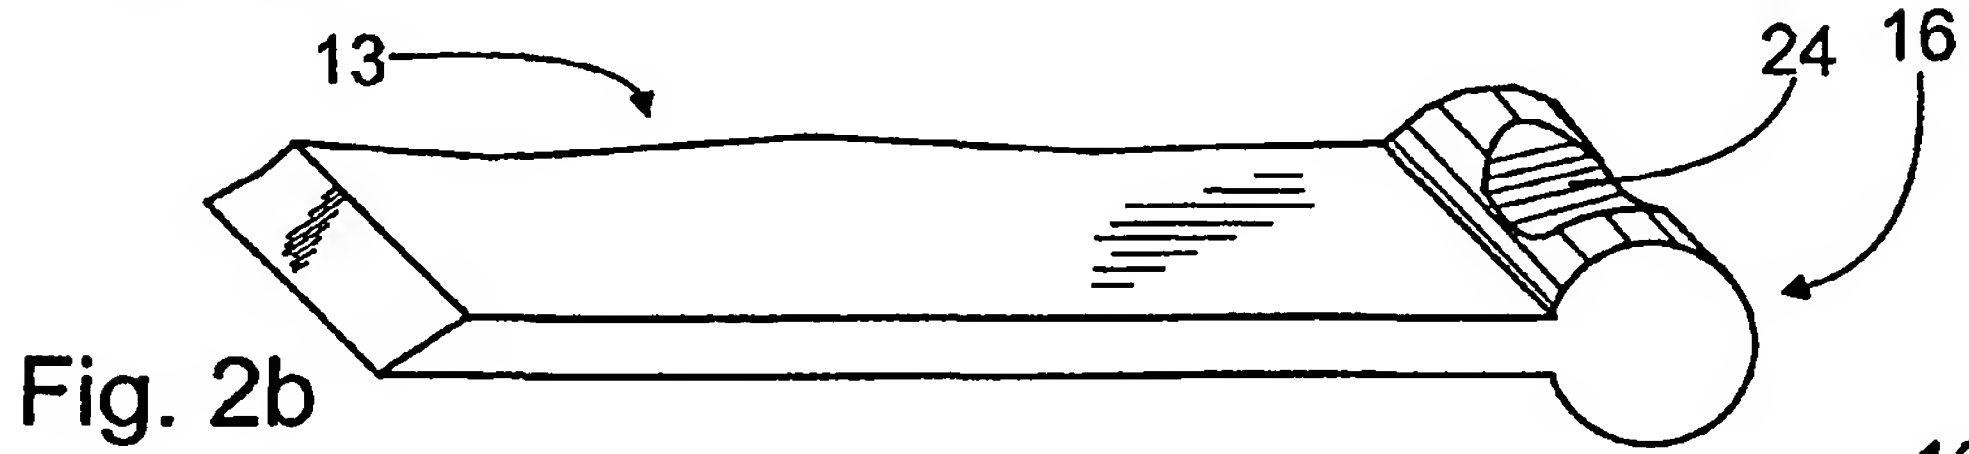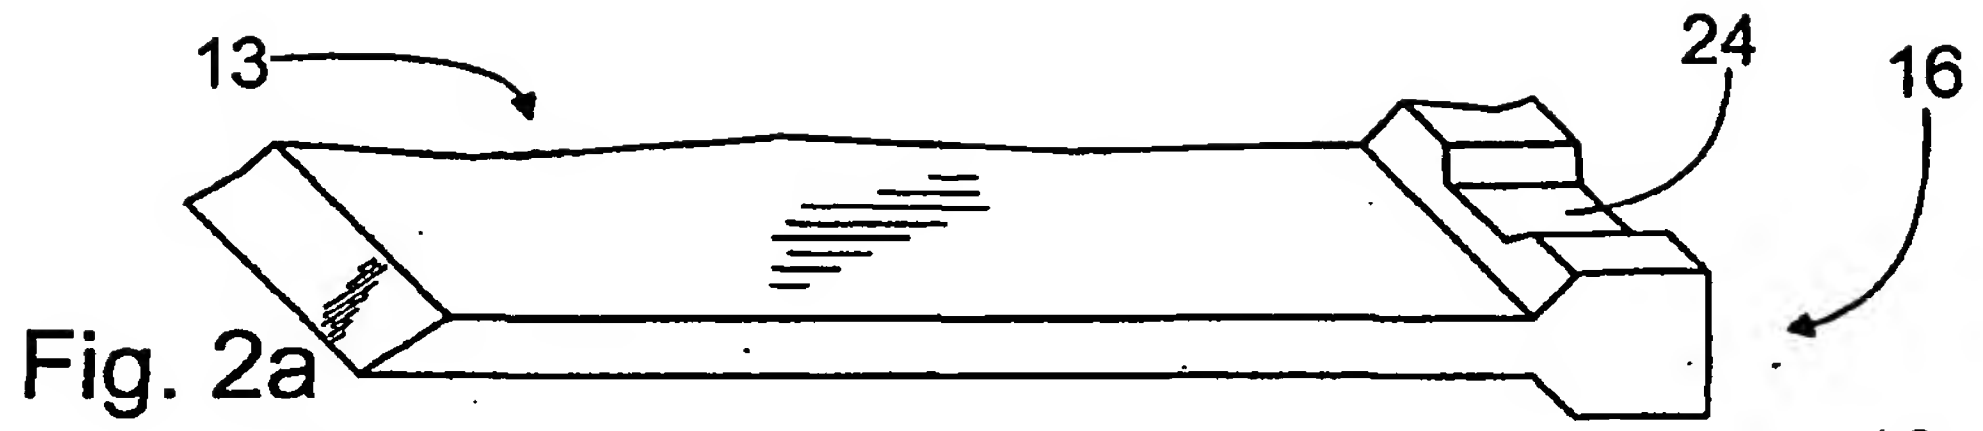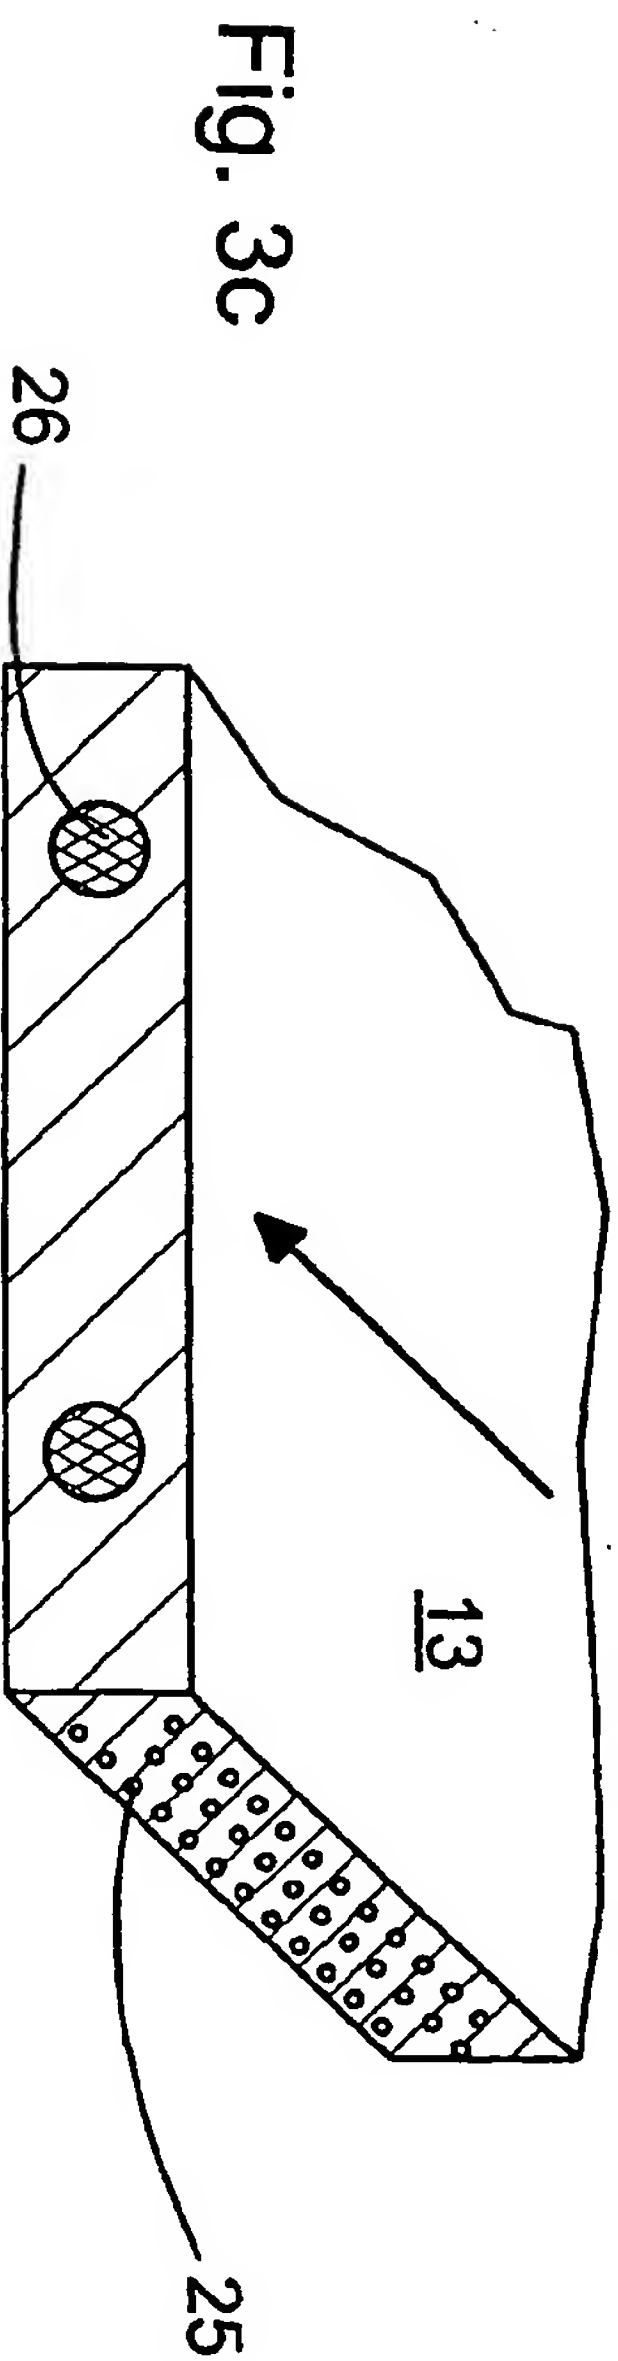

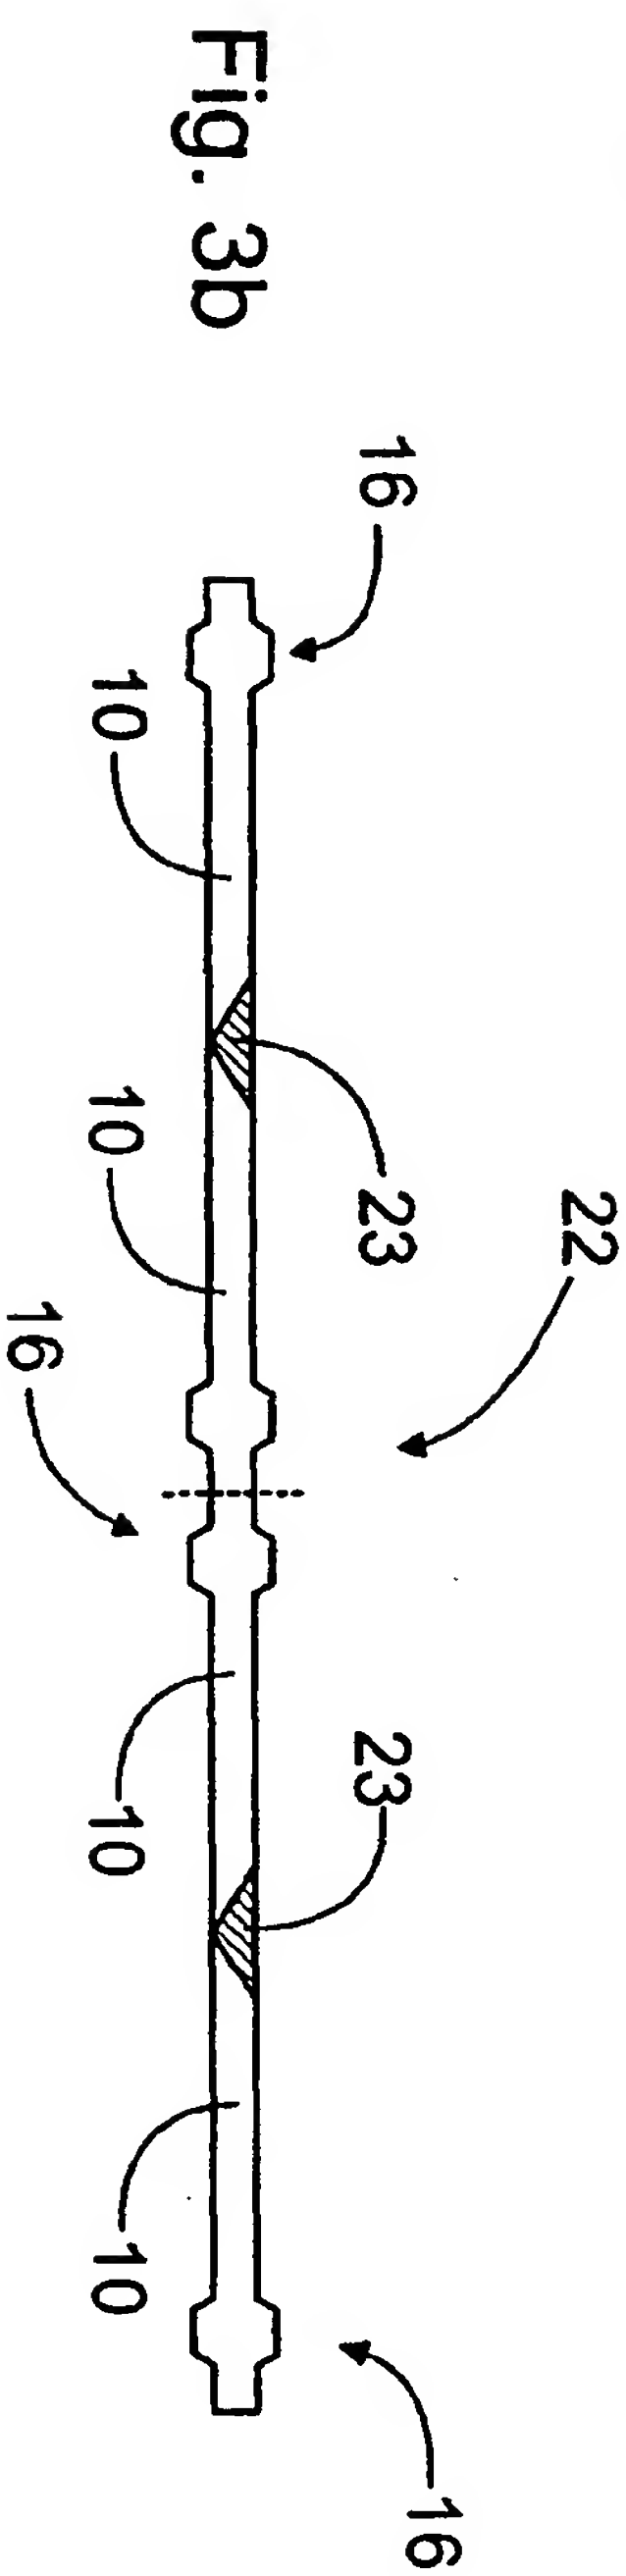

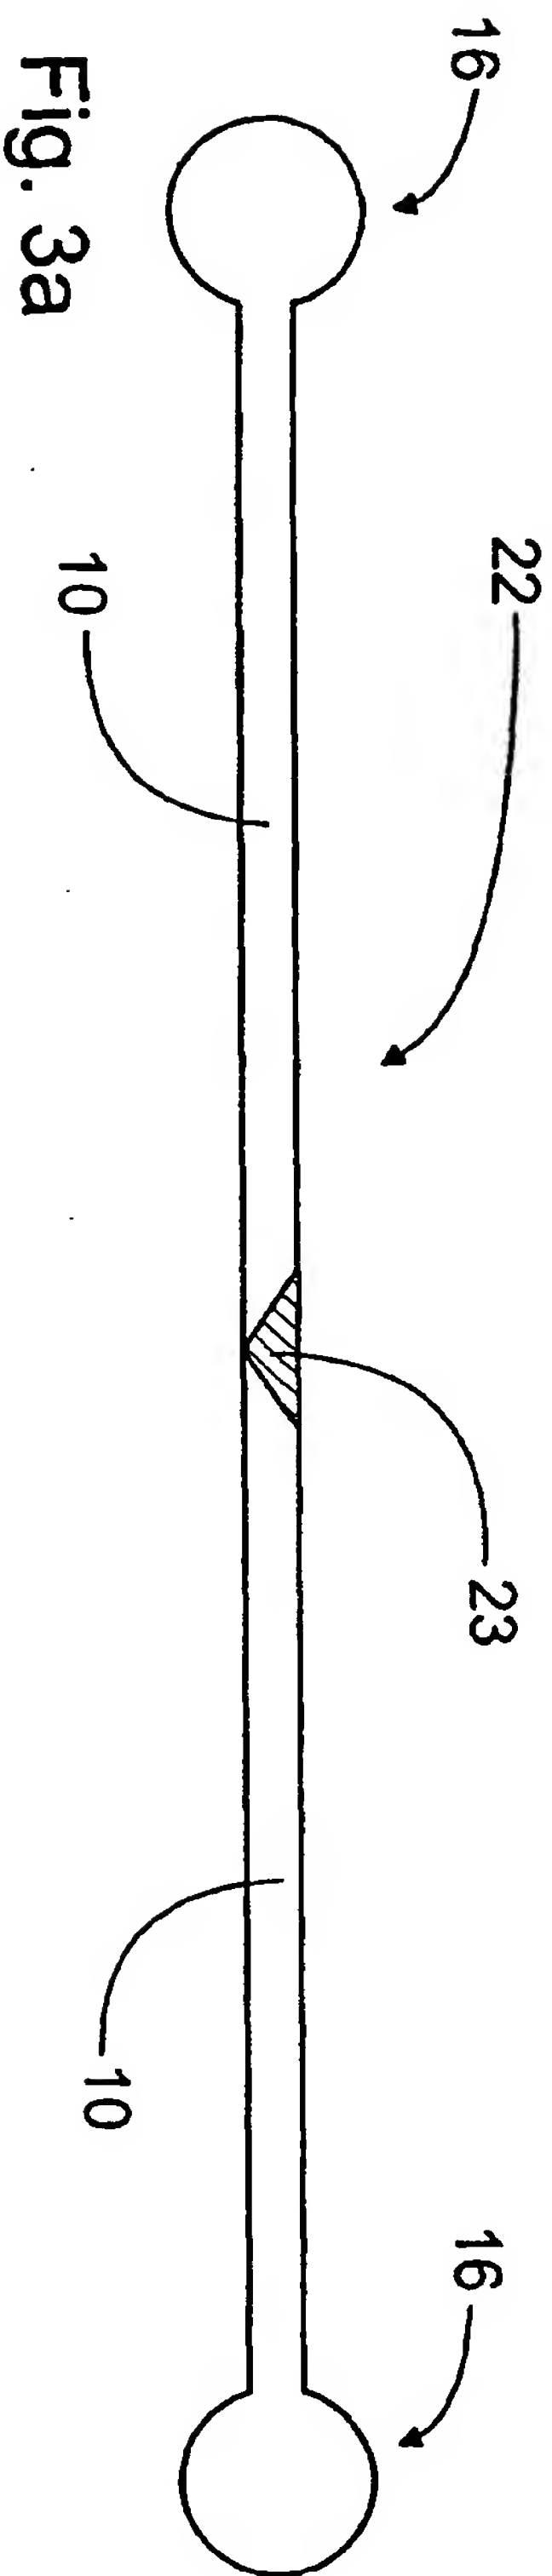

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 01 10 2568

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IntCl.7)
Y	US 5 110 415 A (BOUCHER NORMAND ET AL) 5 May 1992 (1992-05-05) * figure 14 * * column 2, line 42 - line 58 * * column 5, line 25 - line 29 * * claim 8 *	1-3,5-7	B05C11/04 //D21G3/00, D21H25/10
Y	US 4 241 691 A (SEGELEY LAWRENCE R ET AL) 30 December 1980 (1980-12-30) * figure 3 * * claim 6 *	1-3,5-7	
A	WO 99 12726 A (VALMET CORP ; RATA ILKKA (FI); VESTOLA JUHA (FI)) 18 March 1999 (1999-03-18) * abstract * * claim 6 *	1-10	
A	WO 99 64674 A (VALMET CORP ; ESKELINEN ILKKA (FI); LINTULA TIMO (FI); NIEMI KARI) () 16 December 1999 (1999-12-16) * page 3, line 18 - line 22 *	1-10	TECHNICAL FIELDS SEARCHED (IntCl.7)
A	DE 44 21 350 A (SCHENK GMBH) 21 December 1995 (1995-12-21) * column 2, line 60 - column 3, line 2 *	1	B05C
A	DE 195 08 298 A (JOH CLOUTH FA) 12 September 1996 (1996-09-12) * the whole document *	1	
X	US 4 000 956 A (CARLSON ROBERT G ET AL) 4 January 1977 (1977-01-04) * figure 1 * * column 3, line 11 - line 24 *	1,2,5	
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 29 March 2001	Examiner Naeslund, P
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 10 2568

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

29-03-2001

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5110415 A	05-05-1992	AU 632661 B	07-01-1993
		AU 7026591 A	13-02-1992
		BR 9101133 A	26-11-1991
		CA 2039301 A	24-10-1991
		DK 73591 A	24-10-1991
		EP 0454403 A	30-10-1991
		EP 0454404 A	30-10-1991
		FI 910481 A	24-10-1991
		JP 4228695 A	18-08-1992
		NO 911578 A	24-10-1991
		NZ 236947 A	26-03-1993
US 4241691 A	30-12-1980	NONE	
WO 9912726 A	18-03-1999	FI 101637 B	31-07-1998
		AU 9074098 A	29-03-1999
		EP 0944470 A	29-09-1999
WO 9964674 A	16-12-1999	FI 981312 A	10-12-1999
		AU 4517399 A	30-12-1999
DE 4421350 A	21-12-1995	NONE	
DE 19508298 A	12-09-1996	NONE	
US 4000956 A	04-01-1977	DE 2642126 A	23-06-1977
		FR 2336577 A	22-07-1977
		GB 1549888 A	08-08-1979
		IT 1070712 B	02-04-1985
		JP 1292805 C	16-12-1985
		JP 52077912 A	30-06-1977
		JP 60014884 B	16-04-1985
		US 4071184 A	31-01-1978

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☒ **BLACK BORDERS**

☒ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☒ **FADED TEXT OR DRAWING**

☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.